

# Max TC Power Plus G4

- ✓ The Ultimate Powerful TCU
- ✓ Extreme cooling power 400W@-55°C (Steady state)
- ✓ From -75°C to +200°C

MaxTC Plus Actuators: (Optional)



180 Angle head



Right angle head

MaxTC Power Plus G4 is the most high-performance System. Handling high power dissipation DUT's, by direct conduction testing, available today



**MaxTC Power Plus** was designed with high power and flexibility in mind, allowing for customization to suit different package and interface variations.

The system allows for forcing temperature across a wide range of high power device sizes and types, whether socketed or soldered to board.

With state of the art design and technology the Max TC Power Plus unit stimulates DUT to the desired temperature precisely and consistency by direct contact with a powerful thermal head.

**Powerful stand-alone Thermal control unit features:**

- Cooling Power -55°C@400W (steady state)
- Ramp Rate up to 75°C/Min
- Temperature stability: ±0.5°C
- Temperature Range -75°C to 200°C
- Minor temperature overshooting at high power spikes
- Fast recovery time at high power spikes
- Replace LN2, Thermostream, Chillers and Chambers
- Remote controlled

**MaxTC Power Plus is a stand-alone, plug&play unit, requires only:**

- AC Input; MaxTC: 208-240 VAC; 1~ 50Hz /60Hz 16A
- Plug Type: NEMA L6-20 or 30
- Clean dry air or nitrogen for condensation free operation during cold testing

**MaxTC Power Plus with 'Clip-On Actuator' & Z-axis integrated**

- Robust and small footprint
- Setup is very fast and convenient using the clip connects.
- Precise and consistent force, contact and thermal conductivity
- Touch screen for accurate actuating force control in Kgf, (remote controlled)
- Fast and simple to attach and detach the thermal head using the clip connect.
- Adaptable for variety of soldered and socketed devices
- Compressed air supply ONLY is required. (80PSI maximum, 4mm air pipe hose)
- Ideal for bench testing, ATE and productive test engineering

## System General

Temperature Range	-75°C to +200°C
Temperature Accuracy	±0.5°C
Typical Transition Rates	Up to 75°C/min (ramp rate controllable)
Temperature Sensor	Type K Thermocouple Ports, Thermal Diode K-type thermocouple
DUT dimensions	Up to 100 mm

## Mechanical Dimensions

System Enclosure mm / inch	(L) 610mm x (W) 505 mm x (H) 365 mm (L) 21.8" x (W) 17.7" x (H) 11.8"
System Weight	~65 kg
Thermal Head Size (WxHxD)	Square type: 73mmx73mmx40mm
Thermal Head Weight	~1.5kg
Thermal Head Hose	~2-meter (6.5ft) Head Distance

## Facilities Requirements

Electrical	208-240VAC, 50/60Hz, 16A
Operating Temp.	10°C to 30°C (non-condensing)
Plug	NEMA L6-20/30
Compressed Dry Air *	<.0.5cfm @90psi (-60°C dew point)


## Data/Communications

USB	Type B
Ethernet TCP/IP	RJ-45
Touch Screen Display	7" LCD

\* Compressed Dry Air is required only to avoid condensation during cold testing

## Product features

- Fast time to stable temperature(Tcase)
- Short stabilizing soak time and overshooting
- Temperature stability: ±0.5°C
- Condensation FREE at cold test
- Maintenance FREE system
- Fully programmable:available drivers LABVIEW, MATLAB, VB, C++, C#,Python and others
- PID overshooting control
- Stand-alone plug and play system
- No external chiller or compressed air is required
- Software controlled transition rates to eliminate thermal shock
- Suitable for testing any socketed and soldered DUT up to 100mm size
- Environmentally friendly operation
- ESD safe product
- Min and Max temperature safety lock
- Thermal stream/chamber/chiller replacement
- High Reliability Testing
- ATE, SLT and Bench

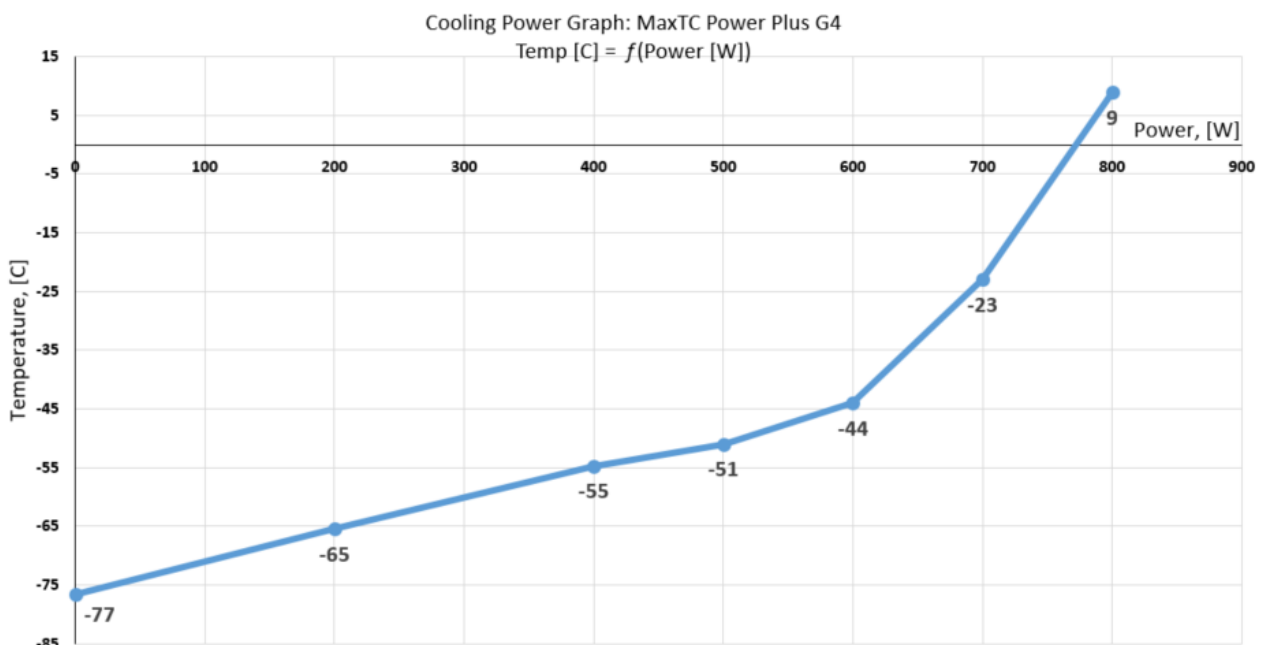

[sales@mechanical-devices.com](mailto:sales@mechanical-devices.com) – [www.mechanical-devices.com](http://www.mechanical-devices.com)

IP of Mechanical Devices – Strictly Private | copyright 2012